


BUS-BAR CHAMBERS

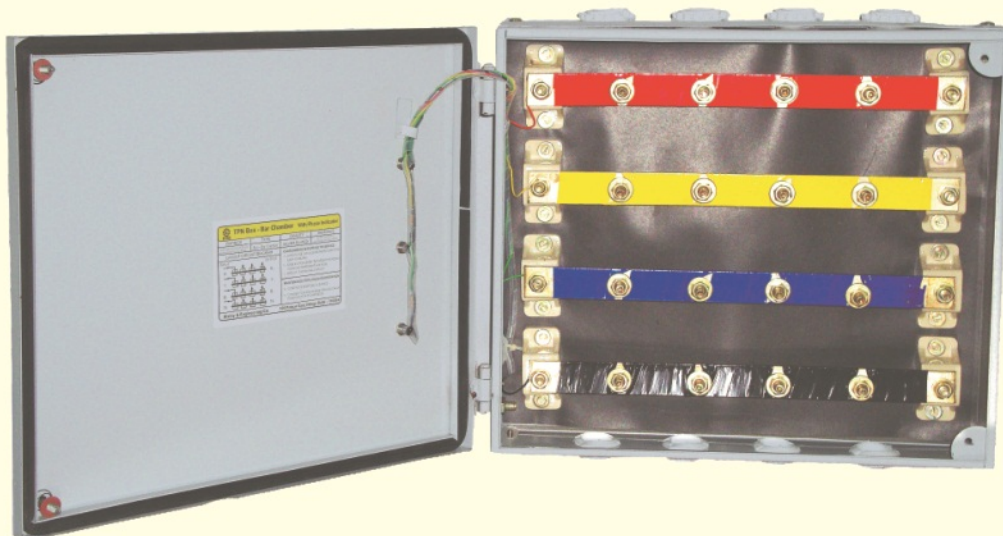

TECHNICAL FEATURES:-

Bus Bar strips are used of electrolytic grade copper with silver electroplating for efficient conductivity having purity of 99.9%

Ideally suited for direct termination of PVC sheathed/ unsheathed/ Armored aluminium / copper conductor cables. Generous wiring space.

Non-ferrous, bright silver plated fixed contacts for high level contact efficiency. Complete earthing of enclosures in accordance with relevant IS.

Detachable door to facilitate wiring by an average electrician.

Conduit knock-outs at top and bottom with PVC cable gland.

Adequate size copper bus strip as current rating prescribed in relevant IS specifications.

First time with phase (R, Y, B) Indicator, Voltmeter & Selector Switch at Prevailing prices.

Color coding insulation on each phase Bus-Bar strip for easy maintenance of phase sequence.

International 'DANGER' sticker/ plate for warning considering safety factors.

Availability of ranges up to **1000 A** and above to that on demand.



KISLAY